





Features

- Wide input range 100~305VAC(Class I)
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- LVLE(H type), Class 2(24V) power unit
- Surge protection with 6KV/4KV (10KV/6KV optional)
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- · Comply with UL Class P
- Life time >50,000 hrs. and 5 years warranty

- Applications
 - Skyscraper lighting
 - Street lighting
 - Floodlight Lighting
 - · Stage lighting
 - Fishing lighting
 - · Horticulture lighting
 - Bay lighting
 - · DMX power supply
 - Type HL for use in class I, Division 2

GTIN CODE

MW Search: <u>https://www.meanwell.com/serviceGTIN.aspx</u>

Description

XLG-100 series is a 100W LED AC/DC driver featuring the constant power mode.XLG-100 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 8000mA. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for - $40^{\circ}C \sim +90^{\circ}C$ case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-100 series comply with the latest version of IEC61347/GB19510.1 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

Туре	Function	Note
Blank	Io and Vo fixed. (For harsh environment)	By request
A	lo adjustable via built-in potentiometer	In Stock
AB	AB lo adjustable via built-in potentiometer +3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	

Note: 1.12V and 24V models without the AB type

2. India version needs MOQ for production, please consult MEANWELL for detail



SPECIFICATION

MODEL		XLG-100 -12-	XLG-100 -24	•			
	DC VOLTAGE	12V 24V					
	CONSTANT CURRENT REGION Note.2	8.4~ 12V	16.8~ 24V				
	RATED CURRENT (Default)	8A	4A				
	RATED POWER	96W	96W				
	RIPPLE & NOISE (max.) Note.3	150mVp-p	240mVp-p				
		Adjustable for A-Type only (via the built-in	potentiometer)				
	CURRENT ADJ RANGE	4~8A	2~4A				
OUTPUT	VOLTAGE TOLERANCE Note.4		±2.0%				
UUIFUI	LINE REGULATION	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2%	±1%				
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100ms/	115VAC				
	HOLD UP TIME (Typ.)	12ms/ 230VAC 12ms/ 115VAC					
		100 ~ 305VAC 142 ~ 431VDC					
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47~63Hz					
	POWER FACTOR	PF≧0.97/115VAC, PF≧0.95/230VAC, PF≧	≥0.92/277VAC@full load				
	TOTAL HARMONIC DISTORTION	THD< 10%(@load≧50%/115VC,230VAC;	@load≧75%/277VAC)				
INPUT	EFFICIENCY (Typ.)	92%	92%				
	AC CURRENT	1.1A/115VAC 0.5A/230VAC 0.42A	/277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300us measure	d at 50% lpeak) at 230VAC; Per NEMA 4	10			
	MAX. No. of PSUs on 16A						
	CIRCUIT BREAKER	8units (circuit breaker of type B) / 14 units	(circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	NO LOAD	Nelseda	an atom daniel and the N				
	POWER CONSUMPTION	No load power consumption <0.5W(for	or standard version)				
		95 ~ 108%					
	OVER CURRENT	Hiccup mode or Constant current limiting,	recovers automatically after fault condition	on is removed			
	SHORT CIRCUIT	Hiccup mode or Constant current limiting, r					
PROTECTION		13.5 ~ 18V	27 ~ 34V				
	OVER VOLTAGE	Shut down output voltage, re-power on to					
		320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed)					
	INPUT OVER VOLTAGE Note.7	Can survive input voltage stress of 440Vac for 48 hours					
	OVER TEMPERATURE	Shut down output voltage, re-power on to recover					
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to " OUTF					
	MAX. CASE TEMP.	Tcase=+90°C					
		20 ~ 95% RH non-condensing					
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
ENVIKONMENI	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cvcle, period for 72min. each along X, Y, Z axes					
	SAFETY STANDARDS Note.7	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750(type"HL"), UL879, CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; GB19510.1, GB19510.14;EAC TP TC 004;J61347-1(H29), J61347-2-13(H29),KC61347-1,KC61347-2-13,					
		IS15885(Part2/Sec13)(for XLG-100I type only);NOM-058-SCFI-2017(except for Blank type); IP67 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 50	00VDC / 25°C / 70% RH				
		Parameter	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17	743			
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15) ,GB/T 17	743			
		Harmonic Current	BS EN/EN61000-3-2, GB17625.1	Class C @load≥50%			
EMC		Voltage Flicker	BS EN/EN61000-3-3				
SAFETY &		BS EN/EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
		Radiated	BS EN/EN61000-4-3	Level 3			
ſ	EMC IMMUNITY	EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6K/10K option			
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
ſ				>95% dip 0.5 periods, 30% dip 25 periods,			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% alp 0.5 periods, 30% alp 25 periods, >95% interruptions 250 periods			
	MTBF	2782.6K hrs min. Telcordia SR-332 (Bel	llcore); 276.4Khrs min. MIL-HDBK	Σ-217F (25℃)			
OTHERS	DIMENSION	140*63*32mm (L*W*H)					
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT	rated current and 25° of ambient terms	aratura			
NOTE	PACKING 1. All parameters NOT specially 2. Please refer to "DRIVING ME 3. Ripple & noise are measured 4. Tolerance : includes set up to 5. De-rating may be needed unr 6. Length of set up time is meas 7. Input voltage only for XLG-10 8. The driver is considered as complete installation, the fina (as available on https://www. 9. The ambient temperature der 10. Please refer to the warranty 11. This series meets the typica 12. Products sourced from the A 13. For any application note and https://www.meanwell.com// 14. To fulfill requirements of the	0.58Kg;24pcs/15Kg/0.85CUFT mentioned are measured at 230VAC input, THODS OF LED MODULE". at 20MHz of bandwidth by using a 12" twist lerance, line regulation and load regulation. Jer low input voltages. Please refer to "STAT ured at first cold start. Turming ON/OFF the 10 I series, and I series without UL/CSA certi component that will be operated in combina l equipment manufacturers must re-qualify E meanwell.com//Upload/PDF/EMI_statement ating of 3.5°C/1000m with fanless models ar statement on MEAN WELL's website at http l life expectancy of >50,000 hours of operati umericas regions may not have the PSE/CC I IP water proof function installation caution,	ed pair-wire terminated with a 0.1uf & 47 IC CHARACTERISTIC" sections for det driver may lead to increase of the set up ficate. tion with final equipment. Since EMC pe EMC Directive on the complete installatic en.pdf) d of 5℃/1000m with fan models for ope b://www.meanwell.com on when Tcase, particularly () point (or C/BIS/KC logo. Please contact your ME please refer our user manual before usi	7uf parallel capacitor. ails. e time. erformance will be affected by the en again. erating altitude higher than 2000m(6500ft). TMP, per DLC), is about 80℃ or less. AN WELL sales for more information. ng.			
NOTE	PACKING 1. All parameters NOT specially 2. Please refer to "DRIVING ME 3. Ripple & noise are measured 4. Tolerance : includes set up to 5. De-rating may be needed unt 6. Length of set up time is meas 7. Input voltage only for XLG-10 8. The driver is considered as a complete installation, the fina (as available on https://www. 9. The ambient temperature der 10. Please refer to the warranty 11. This series meets the typica 12. Products sourced from the A 13. For any application note an https://www.meanwell.com/U 14. To fulfil requirements of the the mains.	0.58Kg;24pcs/15Kg /0.85CUFT mentioned are measured at 230VAC input, THODS OF LED MODULE". at 20MHz of bandwidth by using a 12" twist lerance, line regulation and load regulation. fer low input voltages. Please refer to "STAT sured at first cold start. Turning ON/OFF the 0 I series, and I series without UL/CSA certif component that will be operated in combina I equipment manufacturers must re-qualify E meanwell.com//Upload/PDF/EMI_statement ating of 3.5°C/1000m with fanless models ar statement on MEAN WELL's website at http: Ilfe expectancy of >50,000 hours of operatif wmericas regions may not have the PSE/CC d I P water proof function installation caution, Jpload/PDF/LED_EN.pdf	ed pair-wire terminated with a 0.1uf & 47 IC CHARACTERISTIC" sections for det driver may lead to increase of the set up ficate. Ition with final equipment. Since EMC pe impose the complete installation en.pdf) d of 5°C/1000m with fan models for ope ://www.meanwell.com on when Tcase, particularly (c) point (or C/BIS/KC logo. Please contact your ME, please refer our user manual before usi LED driver can only be used behind a s	7uf parallel capacitor. ails. e time. erformance will be affected by the en again. erating altitude higher than 2000m(6500ft). TMP, per DLC), is about 80℃ or less. AN WELL sales for more information. ng.			




SPECIFICATION

MODEL		XLG-100L-	XLG-100 -H-]			
	RATED CURRENT (Default)	700mA	2100mA				
	RATED POWER	100W	100W				
	CONSTANT CURRENT REGION	71 ~ 142V	27 ~ 56V				
	FULL POWER CURRENT RANGE	700~1050mA	1750~2780mA				
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)	149V	60V				
	CURRENT ADJ. RANGE	350~1050mA	875~2780mA				
	CURRENT RIPPLE	3.0%(@rated current)					
	CURRENT TOLERANCE	±5%					
	SET UP TIME	500ms/230VAC, 1200ms/115VAC					
		100 ~ 305VAC 142VDC ~ 431VDC					
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" ang " DRIVING METHODS OF LED MODULE"section)					
	FREQUENCY RANGE	47 ~ 63Hz					
		PF≥0.97 / 115VAC, PF≥0.95 / 230VAC, PF≥0.92 / 277VAC at full load					
	POWER FACTOR (Typ.)	(Please refer to "Power Factor Characteristic" section)					
		THD<10% (@ load≧50% at 115VAC/230VAC ,@load≧75% at 277VAC)					
	TOTAL HARMONIC DISTORTION	Please refer to "TOTAL HARMONIC DIST	ORTION (THD)" section				
INPUT	EFFICIENCY (Typ.)	92.5%	91%				
	AC CURRENT (Typ.)	1.1A / 115VAC 0.5A / 230VAC 0	42A / 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs measured a	t 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. NO. of PSUs on 16A						
	CIRCUIT BREAKER	8 unit(circuit breaker of type B) / 14 units(c	ircuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	STANDBY						
	POWER CONSUMPTION	Standby power consumption <0.5W for	or AB-Type(Dimming OFF)(for stand	ard version)			
		105 - 150%					
	OVER POWER	105 ~ 150% Hiccup mode, recovers automatically after	fault condition is removed				
		Hiccup mode or Constant current limiting, r		n is removed			
	SHORT CIRCUIT						
PROTECTION	OVER VOLTAGE	160 ~ 220V	66 ~ 90V				
		Shut down output voltage, re-power on to recover					
	INPUT OVER VOLTAGE Note.7	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed)					
		Can survive input voltage stress of 440Vac for 48 hours Shut down output voltage, re-power on to recover					
	OVER TEMPERATURE WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
			of LOAD vs TEIM EIKATOILE section)				
	MAX. CASE TEMP.	Tcase=+90°C					
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
Entertonment	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
		UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384;					
	SAFETY STANDARDS Note.7	GB19510.1, GB19510.14; EAC TP TC 004; J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13,					
		IS15885(Part2/Sec13)(for XLG-100I type onl	y);NOM-058-SCFI-2017(except for Blank ty	vpe); IP67 approved			
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 50	0VDC / 25℃ / 70% RH				
EMC		Parameter	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15),GB/T 177	43			
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15) ,GB/T 177				
	LING EMIGOION	Harmonic Current	BS EN/EN61000-3-2 ,GB17625.1	Class C @load≥50%			
		Voltage Flicker	BS EN/EN61000-3-3				
		BS EN/EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
				, , ,			
		Radiated	BS EN/EN61000-4-3	Level 3			
	EMC IMMUNITY	EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6K/10K option			
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
	MTBF	2782.6K hrs min. Telcordia SR-332 (Bel	Icore); 276.4Khrs min. MIL-HDBK	-217F (25℃)			
OTHERS	DIMENSION	140*63*32mm (L*W*H)					
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT					
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. Please refer to "DRIVING METHODS OF LED MODULE". Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up tolerance, line regulation and load regulation. Input voltage only for XLG-100 I series, and I series without UL/CSA certificate. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EML statement en.pdf) The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (b) point (or TMP, per DLC), is about 80℃ or less. Product sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN_Pdf To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can						
	https://www.meanwell.com/L 14. To fulfill requirements of the the mains. 15. If you need the NOM (Mexic	Ipload/PDF/LED_EN.pdf	LED driver can only be used behind a sw ales representative for details.	itch without permanently connected to			




BLOCK DIAGRAM PFC fosc : 50~120KHz PWM fosc: 60~130KHz EMI FILTER RECTIFIERS PFC POWER J -0 +V I/P c & RECTIFIERS SWITCHING & -õ -v CIRCUIT FILTER -O DIM+ -O DIM-0.C.P. ⋭₹ (AB Type) FG C O.L.P. DETECTION ⋧⋧Қ PWM PFC CIRCUIT CONTROL CONTROL (<u>†</u> 0.T.P. 0.V.P. DRIVING METHODS OF LED MODULE ※ I-V Operating Area

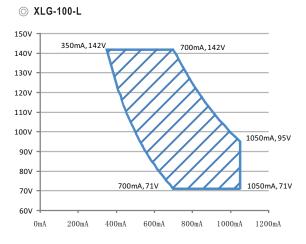


Recommend Performance Region

© XLG-100-12,24

This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

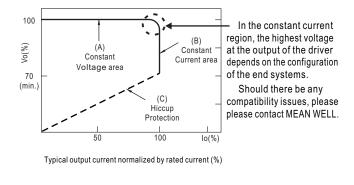


◎ XLG-100-H

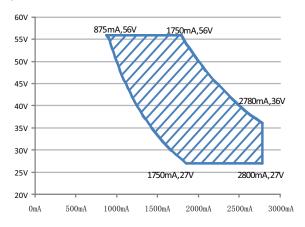






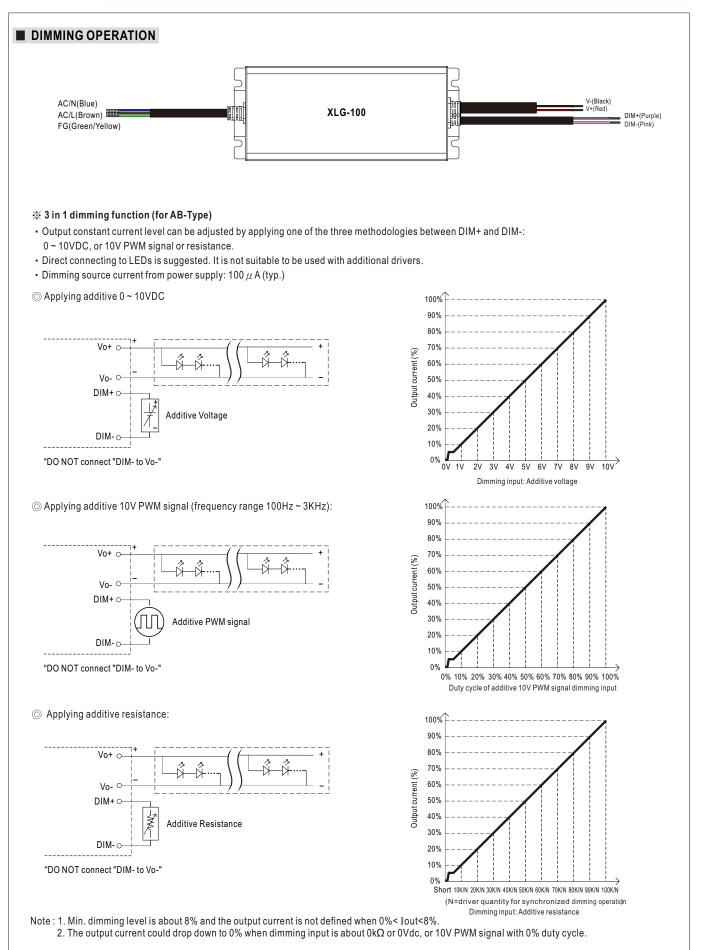




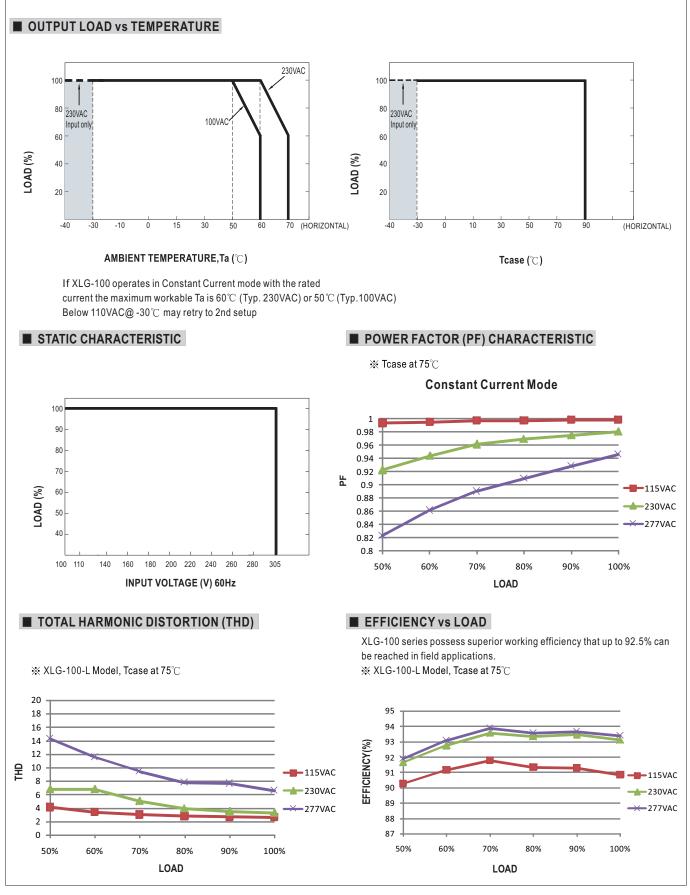

File Name:XLG-100-SPEC 2024-03-12




LIFE TIME

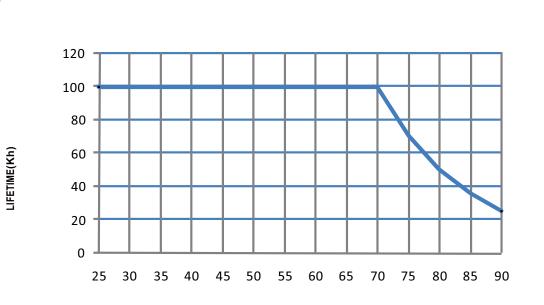

Tcase (° $_{\mathbb{C}}$)



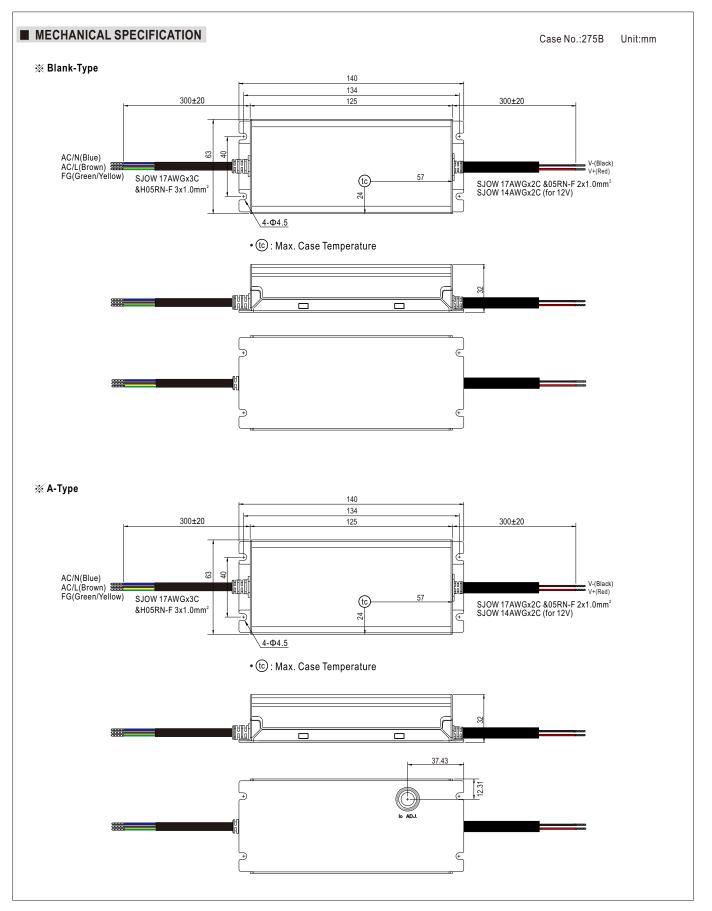



100W Constant Power Mode LED Driver

XLG-100 series

